

## PRODUCT BRIEF

# MT2000

## Power-and-Go Tracker For Discreet Applications

The MT2000 is a real-time powered asset monitoring and tracking system with starter disable, embedded GPS and global cellular functionalities.



### SIMPLE INSTALLATION

The MT2000 enables track and trace workflows with installs as simple as 2 wires. With an onboard antenna and accelerometer, the MT2000 is ready to go out of the box for powered asset traceability.


### VERSATILE APPLICATION

The MT2000 is easily deployed across a multitude of use cases and applications, including scooters, motorcycles and other small, powered assets given its dimensions and power consumption characteristics.

### ACTIONABLE DATA

The MT2000 provides the user or fleet manager with precise real-time location data and immediately notifies you if your asset is moved, tampered with, or crosses a geofence. Starter disable functionality adds security.

Pair MT 2000 with the FusionIoT™ Platform Plus Connectivity for a scalable solution that delivers enhanced control in configuring, monitoring and managing assets.

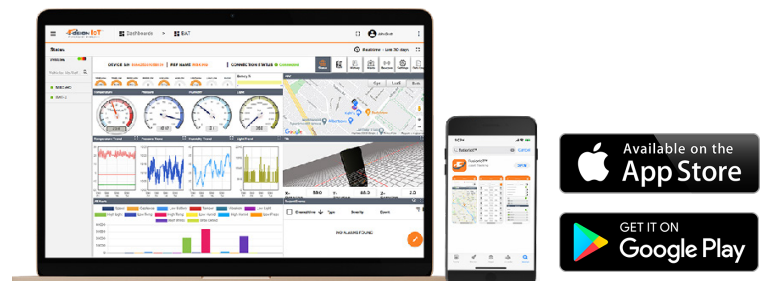

## PRODUCT DETAILS

# MT2000

## Power-and-Go Tracker For Discreet Applications



The optimum device for real-time track, trace and recovery of automobiles, motorcycles, trailers, and other powered mobile assets.

### KEY FEATURES

- 24/7 Real-time Tracking
- Global Capabilities
- Small Form Factor
- Quick and Easy Installation
- OTA (Over-The-Air) Updates

### WEB & MOBILE APPLICATIONS

- Secure Login
- Custom Design & Development
- Supports iOS and Android
- Google Maps
- White Label with Custom Branding

### Technical Specifications

<b>Antenna</b>		Internal
<b>Cellular Service</b>	Technology Band	2G 850/900/1800/1900
<b>GNSS</b>		GPS, Glonass
<b>Accelerometer</b>		3-axis accelerometer (0.8 ms warm start, 2 ms cold start)
<b>Alerts</b>		Disconnection of external battery; Shake detection; Unauthorized movement detection; Geofence; Low external battery detection; Excess speed;
<b>Power Supply</b>		8~33 VDC
<b>Current</b>	Operating Standby	<25 mA <3 mA
<b>Internal Battery</b>		450 mAh
<b>Enclosure</b>	Material Color/Finish Dimension	ABS Plastic (UL94-HB) Black/Textured 76 x 43.5 x 15mm
<b>Inputs/Outputs</b>	Power Ground Auxillary	Battery 12 V 12 V Input Starter Disable
<b>Warranty</b>		1 year device material and parts